
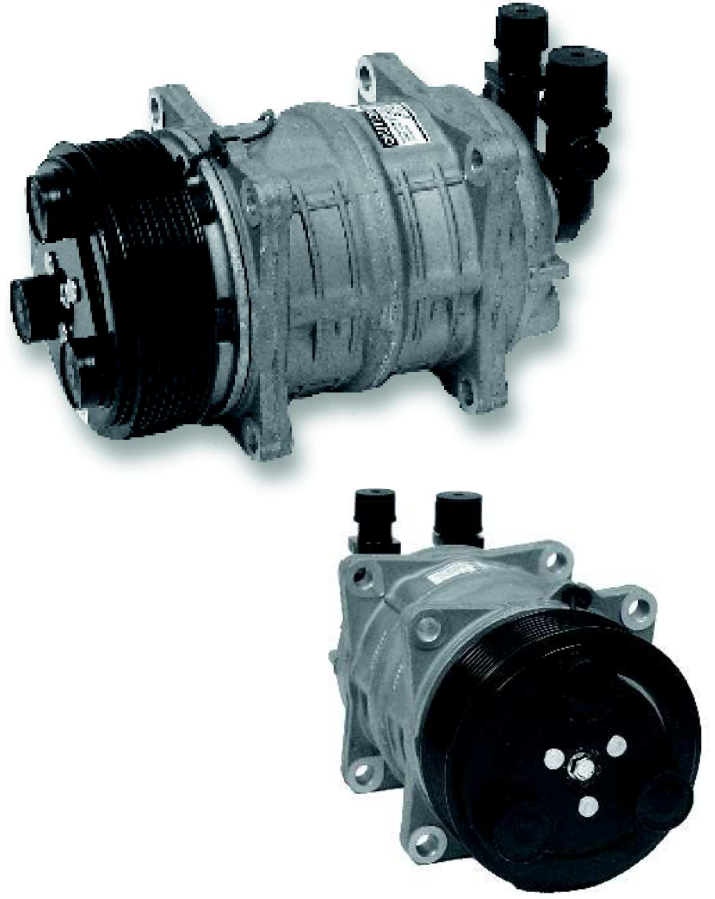


QP-15HD COMPRESSOR DIRECT & EAR MOUNT

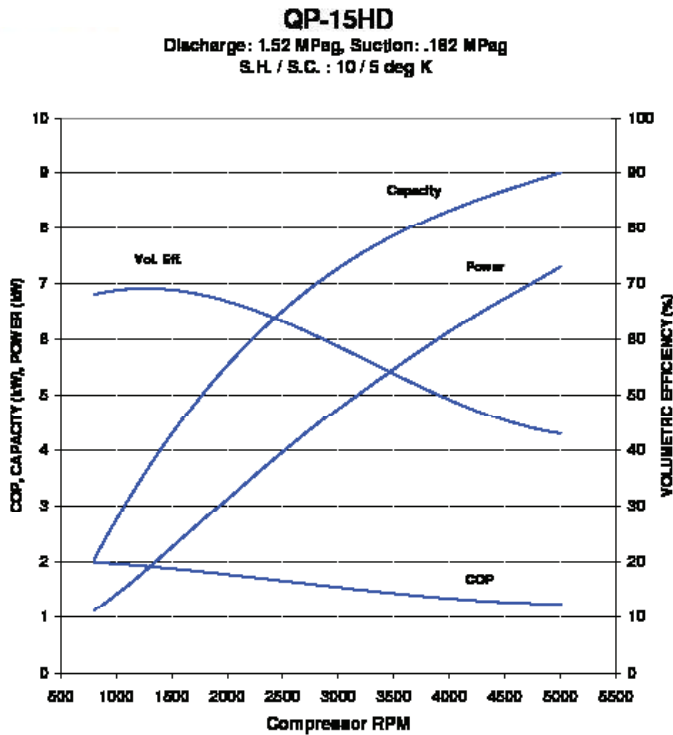



COMPRESSOR SPECIFICATIONS	
Model	QP-15HD
Type	Swash Plate
Number of Cylinders	6
Bore	36 mm (1.42 in)
Stroke	24 mm (0.94 in)
Displacement	146 cm ³ (8.9 cu. in)
Permissible Speed	700-6000 rpm
Refrigerant	R-134a
Lubricant	PAG 46
Oil Charge	150+20 cm ³
Total Weight	6.6 kg (14.7 lbs)

MAGNETIC CLUTCH SPECIFICATIONS	
Type	Electromagnetic Single Plate Dry Clutch
Rated	Voltage 12 V DC or 24 V DC
Belt	2A Groove
Current Consumption	3.75 amperes (max)
Static Torque	Initial: 35 N•m (3.5 kgfm) After burnishing: 49 N•m (5 kgfm)
Rotation	CW/CCW
Weight of Clutch	2.28 kg (5 lbs)

QP-16HD COMPRESSOR EAR MOUNT

QP-16HD

Discharge: 1.52 MPa_g, Suction: .182 MPa_g
S.H. / S.C. : 10 / 6 deg K

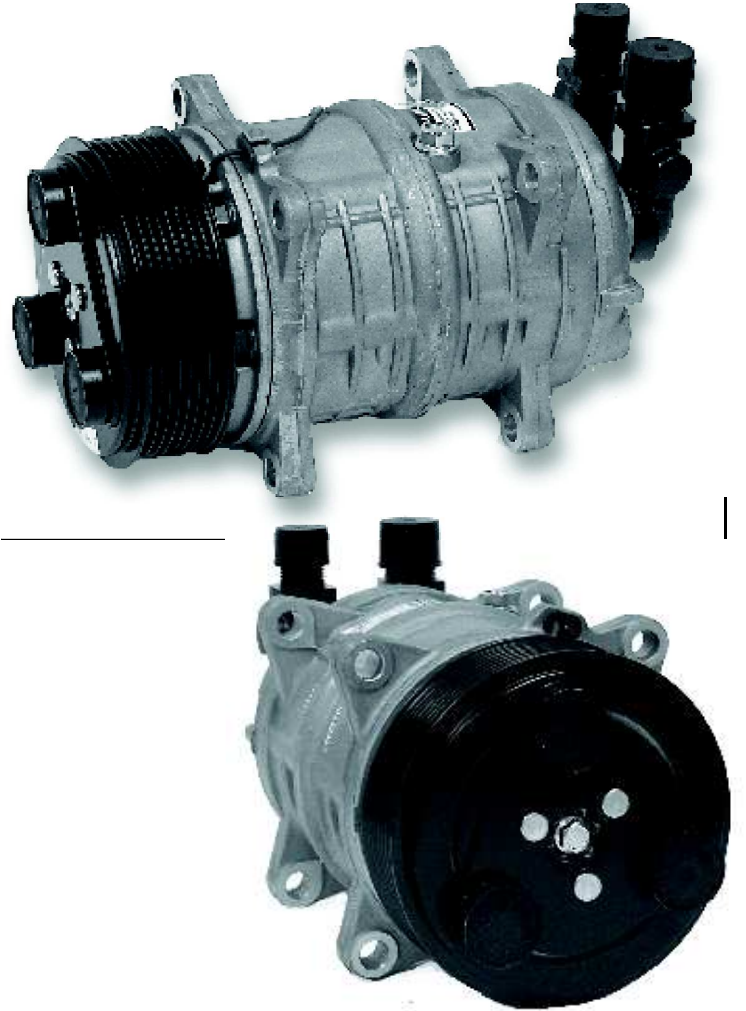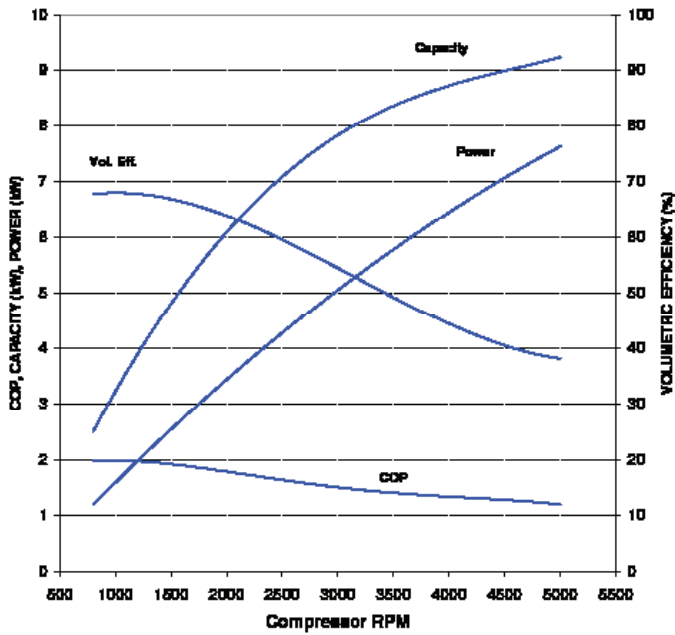

Model	QP-16HD
Type	Swash Plate
Number of Cylinders	6
Bore	36 mm (1.42 in)
Stroke	26.7 mm (1.05 in)
Displacement	163 cm ³ (9.95 cu. in)
Permissible Speed	700-6000 rpm
Refrigerant	R-134a
Lubricant	PAG 46
Oil Charge	180+20 cm ³
Total Weight	7.2 kg (15.9 lbs)

MAGNETIC CLUTCH SPECIFICATIONS	
Type	Electromagnetic Single Plate Dry Clutch
Rated	Voltage 12 V DC or 24 V DC
Belt	2A Groove
Current Consumption	3.75 amperes (max)
Static Torque	Initial: 35 N•m (3.5 kgfm) After burnishing: 49 N•m (5 kgfm)
Rotation	CW/CCW
Weight of Clutch	2.3 kg (5.1 lbs)